

CAT. No.

98615X24IN

IEC 60320 C-14, C-13 DETACHABLE POWER CORD, 15 AMPERE 250 VOLT [UL/CSA], 14/3 AWG, SJTO, 105°C, CORDAGE, 2 POLE-3 WIRE GROUNDING [2P+E], 0.6 METERS [2 FEET] [24"] LONG. BLACK.

APPROVALS

C(UL)US

CERTIFICATIONS

REACH  ROHS  ROHS2  ROHS3

STANDARDS


IEC 60320 C-13  IEC 60320 C-14

**RELATED POWER CORDS:**

CATALOG No	LENGTH
98615X12IN	12 INCHES
98615X18IN	18 INCHES
98615X24IN	24 INCHES
98615X30IN	30 INCHES
98615X36IN	36 INCHES
98615	39 INCHES
98615X48IN	48 INCHES
98615X60IN	60 INCHES
98615X72IN	72 INCHES
98620	79 INCHES
98615X84IN	84 INCHES
98615X96IN	96 INCHES
98625	8FT.-2IN.
98625X9FT	9 FEET
98625X10FT	10 FEET
98625X12FT	12 FEET
98625X15FT	15 FEET
98625X5M	16FT.-5IN.
98625X20FT	20 FEET
98625-LK3	3 FEET, LOCKING C-13
98625-LK6	6 FEET, LOCKING C-13
98625-LK12	12 FEET, LOCKING C-13
98625-Y	8FT.-2IN., Y SPLITTER
98625-Y120	10 FEET, Y SPLITTER
98625-Y180	15 FEET, Y SPLITTER

**SPECIFICATIONS:**

1. OVERALL LENGTH: 0.6 METERS (2 FEET)
2. CONDUCTORS: 14 AWG x 3
3. JACKET: SJTO, 105°C, BLACK
4. PLUG: IEC 60320 C-14, STRAIGHT, BLACK
5. CONNECTOR: IEC 60320 C-13, STRAIGHT, BLACK
6. RATED: 15 AMPERE 250 VOLT

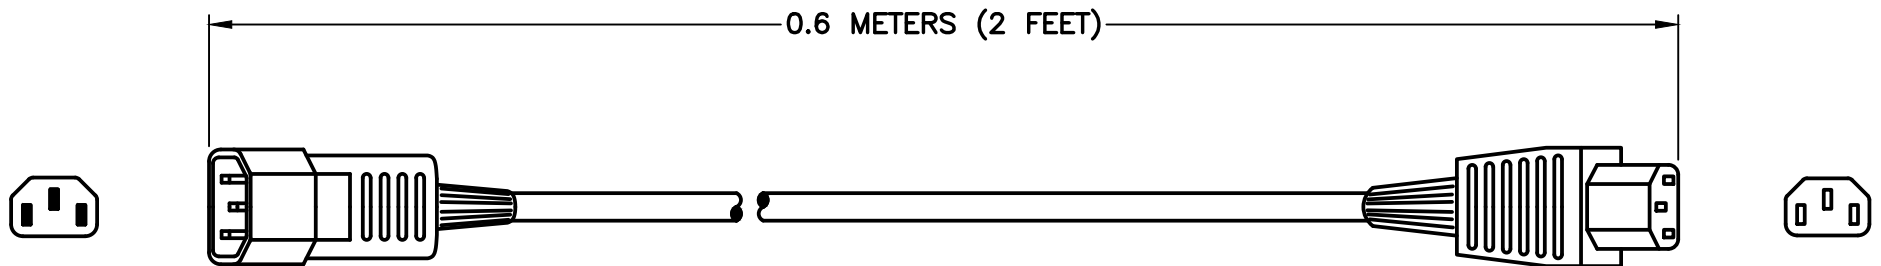

IEC 60320 C-14

IEC 60320 C-13